


PNP Low VCEsat Transistor

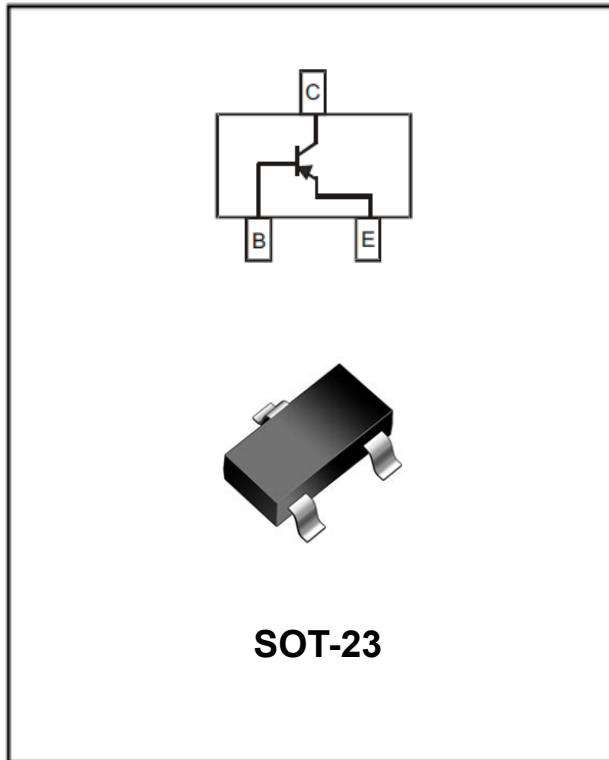

Features

- Moisture Sensitivity Level 1
- Low collector-emitter saturation voltage
- Part no. with suffix "Q" means AEC-Q101 qualified

Application

- DC/DC converters
- Supply line switching
- Battery management
- Strobe flash units

Mechanical Data

- **Package:** SOT-23

Molding compound meets UL 94 V-0 flammability rating,
RoHS-compliant, halogen-free

- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

- **Marking:** ZF.

■Maximum Ratings (Ta=25°C)

Item	Symbol	Unit	Conditions	Value
Collector-Emitter Voltage*	V_{CEO}	V	$I_C = -1mA, I_B = 0$	-40
Collector-Base Voltage	V_{CBO}	V	$I_C = -100\mu A, I_E = 0$	-40
Emitter-Base Voltage	V_{EBO}	V	$I_E = -100\mu A, I_C = 0$	-5
Collector Current	I_C	A		-2
Power Dissipation	P_D	mW		300
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	°C/W		417
Operation Junction Temperature	T_j	°C		150
Storage Temperature	T_{stg}	°C		-55 to +150

■Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
PBSS5240TQ	F2	Approximate 0.008	3000	30000	120000	7" reel



PBSS5240TQ

■Electrical Characteristics (T_a=25°C)

Item	Symbol	Unit	Conditions	Min	Max
Collector-Emitter Voltage	V _{CEO}	V	I _C = -1mA, I _B =0	-40	
Collector-Base Voltage	V _{CBO}	V	I _C = -100uA, I _E =0	-40	
Emitter-Base Voltage	V _{EBO}	V	I _E = -100uA, I _C =0	-5	
Collector-base Cut-off Current	I _{CBO}	nA	V _{CB} = -30V		-100
Base-emitter Cut-off Current	I _{EBO}	nA	V _{EB} = -4V		-100
DC Current Gain	h _{FE}		V _{CE} = -2V, I _C = -100mA	300	
			V _{CE} = -2V, I _C = -500mA	260	
			V _{CE} = -2V, I _C = -1A	210	
			V _{CE} = -2V, I _C = -2A	100	
Collector-Emitter Saturation Voltage	V _{CE(sat)1}	mV	I _C = -100mA, I _B = -1mA		-100
	V _{CE(sat)2}	mV	I _C = -500mA, I _B = -50mA		-110
	V _{CE(sat)3}	mV	I _C = -750mA, I _B = -15mA		-225
	V _{CE(sat)4}	mV	I _C = -1A, I _B = -50mA		-225
	V _{CE(sat)5}	mV	I _C = -2A, I _B = -200mA		-350
Equivalent On-Resistance	R _{CE(sat)}	mΩ	I _C = -500mA, I _B = -50mA		220
Base-Emitter Saturation Voltage	V _{BE(sat)}	V	I _C = -2A, I _B = -200mA		-1.1
Base-Emitter Turn-On Voltage	V _{BE(on)}	V	I _C = -100mA, V _{CE} = -2V		-0.75
Transition frequency	f _T	MHz	I _C = -100mA, V _{CE} = -10V, f=100MHz	100	
Collector Capacitance	C _{ob}	pF	V _{CB} = -10V, I _E =0, f=1MHz		28

■Characteristics (Typical)

Fig.1 - Static characteristic

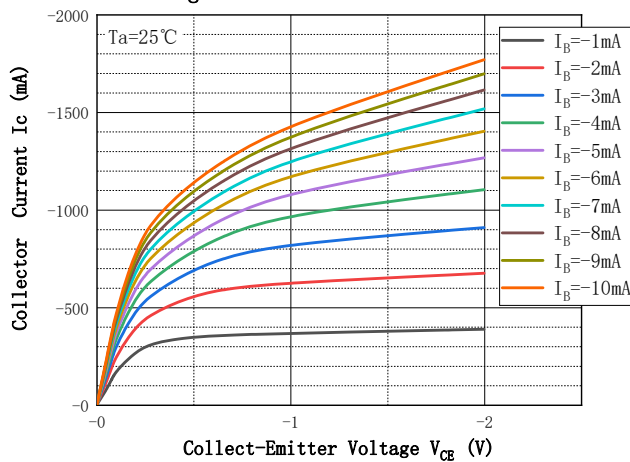


Fig.2 - DC Current Gain

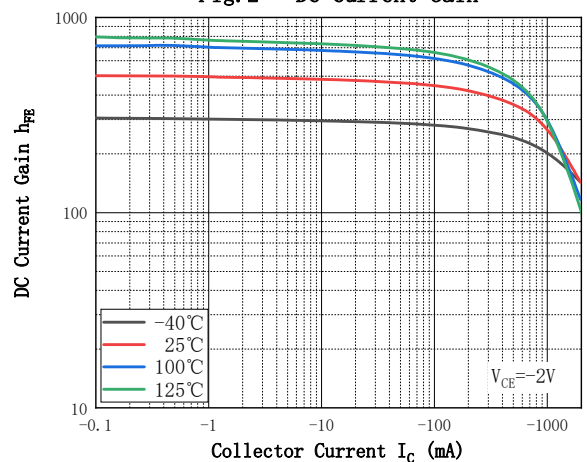




Fig.3 - Collect-Emitter Saturation Voltage

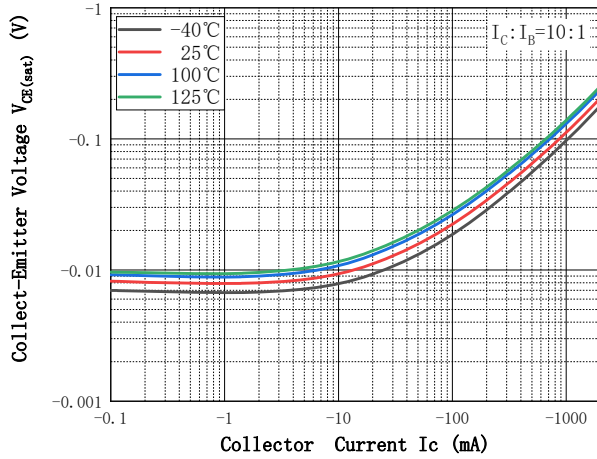


Fig.4 - Collect-Emitter Saturation Voltage

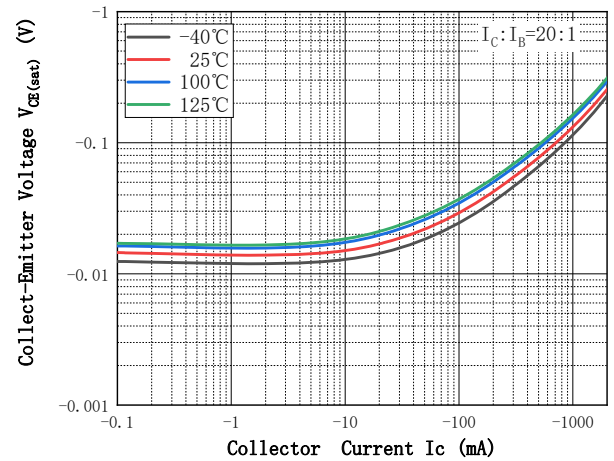


Fig.5 - Base-Emitter Voltage

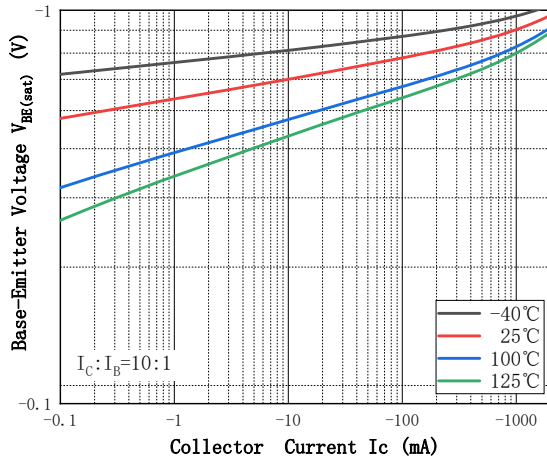


Fig.6 - Base-Emitter Voltage

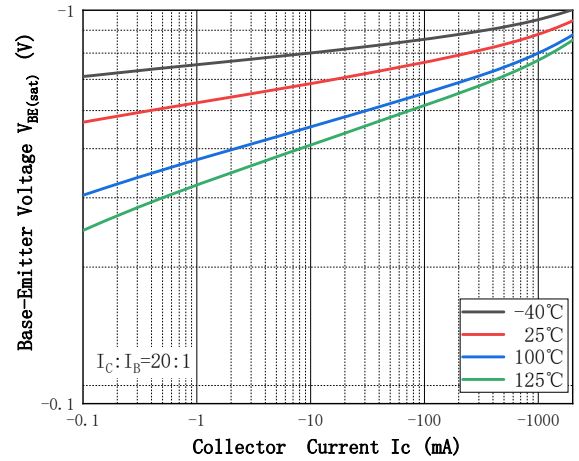


Fig.7 - Base-Emitter On Voltage

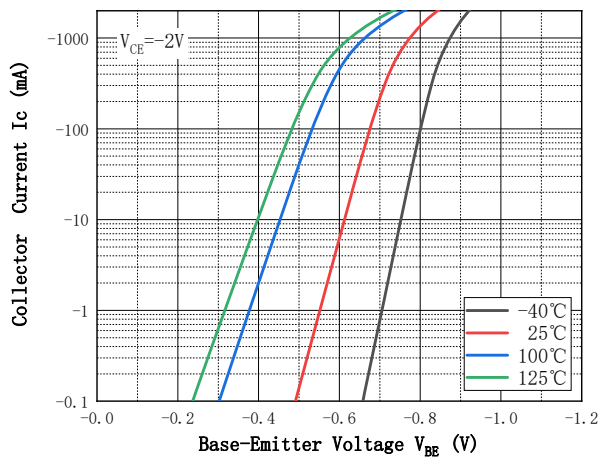


Fig.8 - Cob/Cib—VCB/VEB






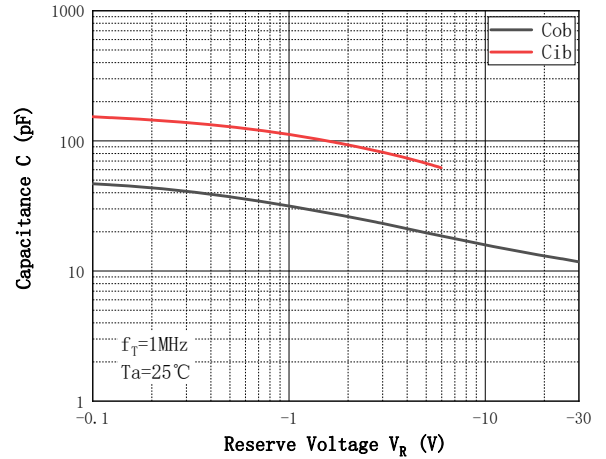


Fig.9 - Power Derating Curve

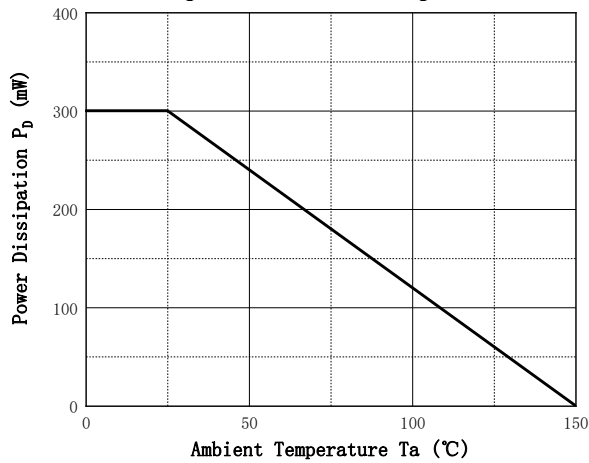

■SOT-23 Package Outline Dimensions & Suggested Pad Layout



UNIT: mm

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037 TYP		0.950 TYP	
e1	0.071	0.079	1.800	2.000
L	0.022 REF		0.550 REF	
L1	0.012	0.020	0.300	0.500
θ	0°	8°	0°	8°

NOTE:

1. PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
2. TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
3. THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, life-sustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.