




## Glass Passivated Three Phase Rectifier Bridge

VRRM 2200 V  
ID 160 A

### Applications

- Three phase rectifiers for power supplies
- Rectifiers for DC motor field supplies
- Battery charger rectifiers
- Input rectifiers for variable frequency drives

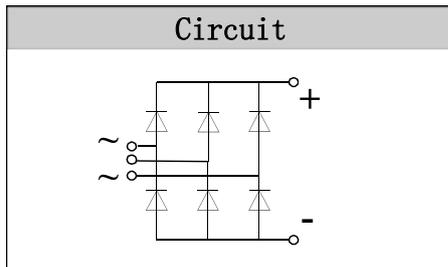

### Features

- Three phase bridge rectifier
- Blocking voltage: 2200V
- Heat transfer through aluminum oxide DBC ceramic isolated metal baseplate
- Glass passivated chip
- UL recognized applied for file no. E230084

### Module Type

TYPE	VRRM	VRSM
MD160S22M3	2200V	2300V

### Maximum Ratings

Symbol	Conditions	Values	Units
ID	Three phase, full wave Tc=100°C	160	A
IFSM	t=10mS Tvj =45°C	2000	A
i <sup>2</sup> t	t=10mS Tvj =45°C	20000	A <sup>2</sup> s
Visol	a.c.50HZ;r.m.s.;1min	3000	V
Tvj		-40 to +150	°C
Tstg		-40 to +125	°C
Mt	To terminals(M6)	5±15%	Nm
Ms	To heatsink(M6)	5±15%	Nm
Weight	Module (Approximately)	230	g

### Thermal Characteristics


Symbol	Conditions	Values	Units
Rth(j-c)	Per diode	0.35	°C/W
Rth(c-s)	Module	0.03	°C/W




**Electrical Characteristics**

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
$r_r$	$T_j=150^{\circ}\text{C}$	-	2.5	-	$\text{m}\Omega$
$V_{f0}$	$T_j=150^{\circ}\text{C}$	-	0.77	-	V
$V_{FM}$	$T=25^{\circ}\text{C}$ $I_F=300\text{A}$	-	1.50	1.70	V
$I_{RD}$	$T_{vj}=25^{\circ}\text{C}$ $V_{RD}=V_{RRM}$ $T_{vj}=150^{\circ}\text{C}$ $V_{RD}=V_{RRM}$	-	-	0.5 6	$\text{mA}$ $\text{mA}$


**Performance Curves**

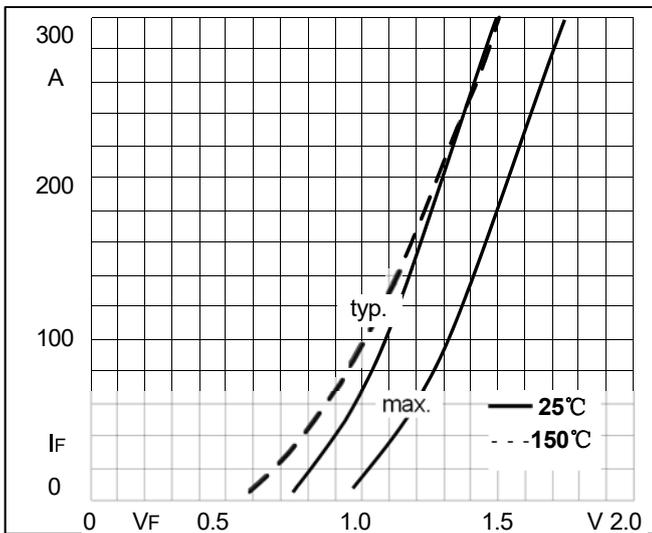


**Fig1. Forward Characteristics**

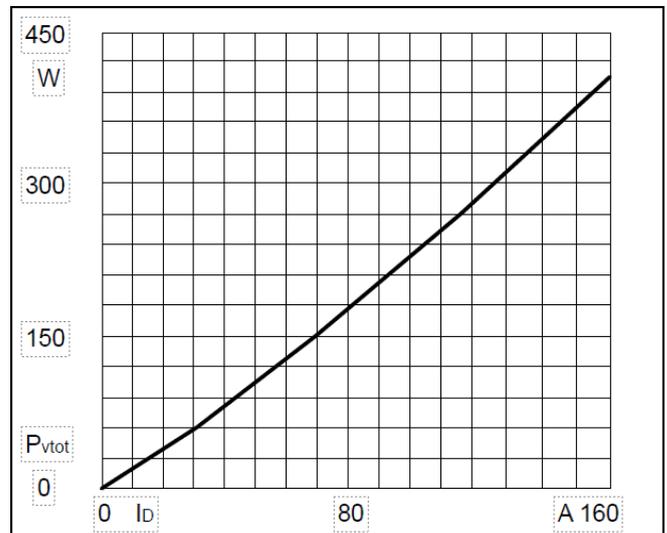

**Fig2. Power dissipation**

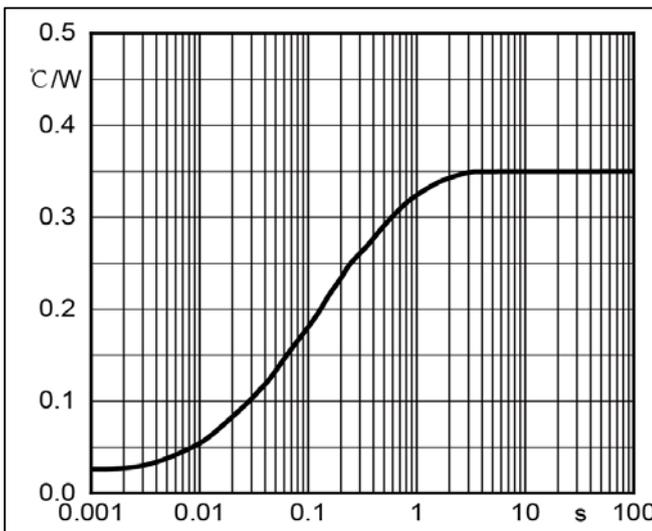

**Fig3. Transient thermal impedance**

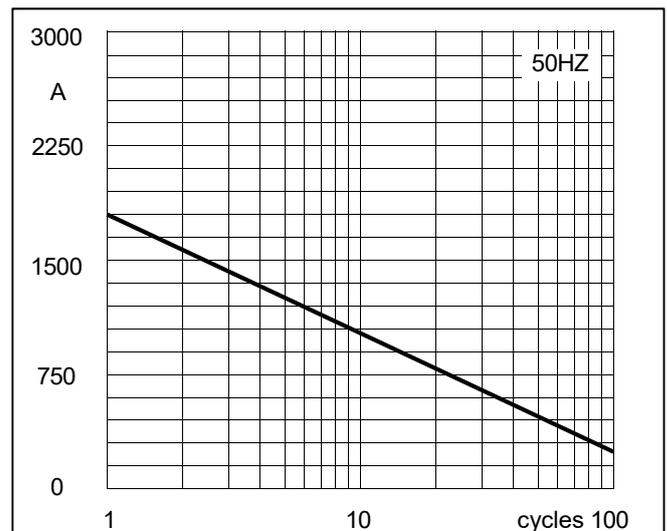

**Fig4. Max Non-Repetitive Forward Surge Current**


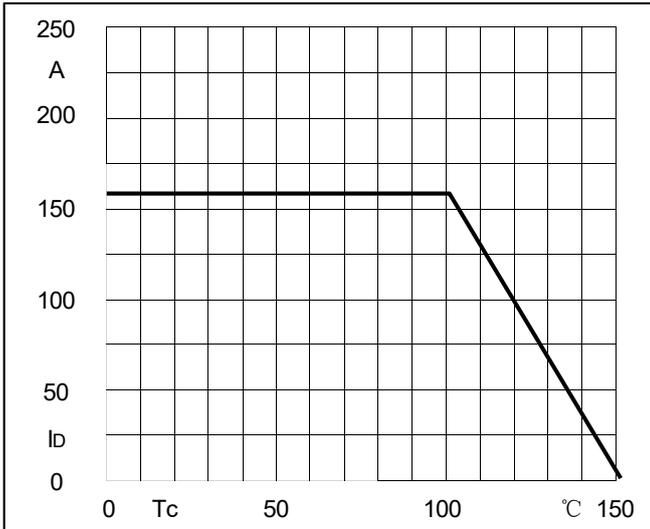


Fig5.Forward Current Derating Curve

### Package Outline Information

CASE: M3

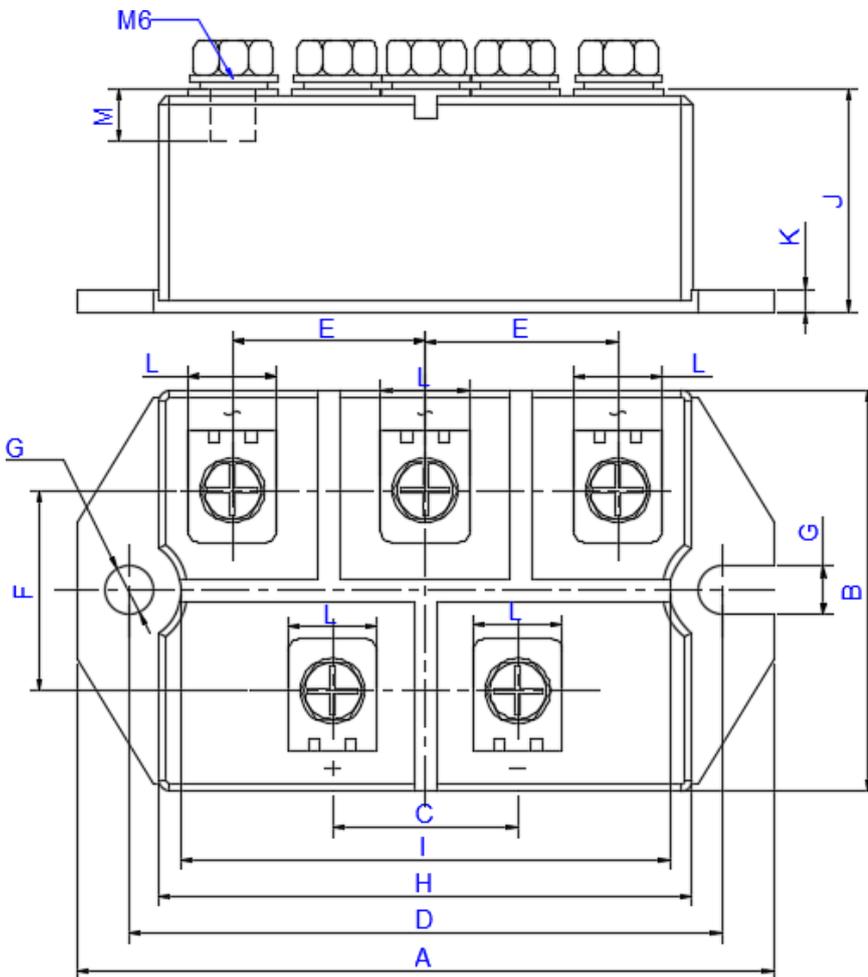

DIM	Min (mm)	Max (mm)	Note
A	93.5	94.5	
B	53.5	54.5	
C	24.5	25.5	
D	79.5	80.5	
E	25.5	26.5	
F	26.5	27.5	
G	6.2	6.8	Ø
H	71.5	72.5	
I	65.5	66.5	
J	29.5	30.5	
K	2.9	3.1	
L	11.9	12.1	
M	11.5	12.5	



**Packing Standard**

Item	Length: A (mm)	Width: B (mm)	Height: C (mm)	Quantity (PCS)
Inner Box	276	258	48	6
Outer Carton	545	295	240	60



### Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>, or consult your nearest Yangjie's sales office for further assistance.